



#### DESCRIPTION

6" LED Floating Gimbal

Adjustable in any direction and easy to use

Perfect for accent lighting

#### FEATURES & BENEFITS

**5 CCT Switchable** - from 2700K to 5000K, or single 3000K

**1 1/2" Deep** - Fits in 1" ceiling space


**Type IC Rated** - No Housing Required

**Driver Inside Connection Box** - No Junction Box Needed

**White and Black** trims in stock

**Damp Location & Airtight**

Ideal for slopped ceilings, wall washing, highlighting artwork, task or general lighting

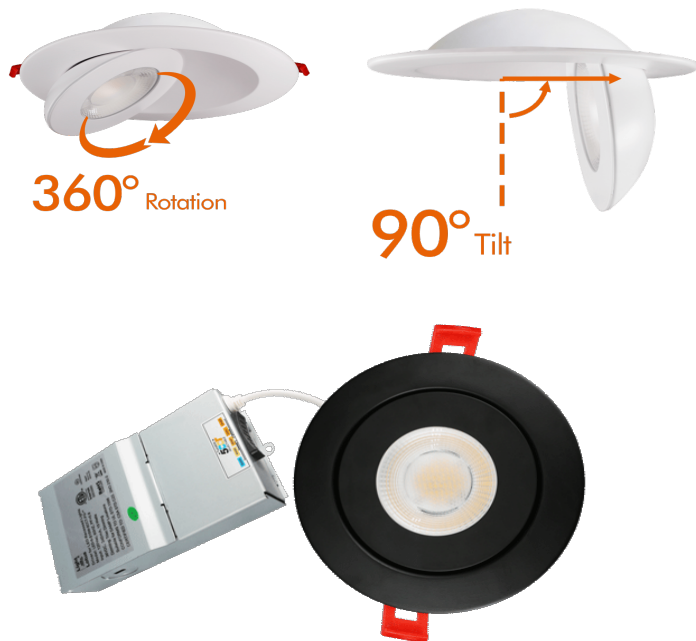

#### ORDERING GUIDE

3 options in stock

3000K White Trim

**LED-6-S15W-3K-FG-WH**

5CCT White Trim

**LED-6-S15W-5CCT-FG-WH**

5CCT Black Trim

**LED-6-S15W-5CCT-FG-BK**

**Lotus LED Lights USA**

250 H Street # 301, Blaine WA 98230 tel 360-200-5500  
Hainesport NJ, Naples FL, Dallas TX, Vancouver WA

[www.LotusLEDLights.com](http://www.LotusLEDLights.com)

## LED-6-S15W-xx-FG

### 6" Round Floating Gimbal Recessed LED 15W

Project:

Location:

Model:

Qty:

Notes:

#### SPECIFICATION

|                       |                                                  |
|-----------------------|--------------------------------------------------|
| Applications          | Slopped ceilings, Wall washing, General lighting |
| Energy Used           | 15 W                                             |
| Color Temperature (K) | 3000K or 5CCT: 2700 - 3000 - 3500 - 4000 - 5000  |
| Light Output (lm)     | 3K: 1520 5CCT : 1180 - 1220 - 1270 - 1270 - 1180 |
| Halogen Equivalent    | 120 W                                            |
| Beam Angle            | 38°                                              |
| CRI                   | 90+                                              |
| Driver Input          | 120V AC 50/60 Hz                                 |
| Dimming               | TRIAC Dimmers 10% - 100%                         |
| Approved Location     | Insulated Ceiling & Damp Locations               |
| Air Tight             | Yes                                              |
| Ambient Temperature   | -4° F (-20° C) to +104° F (+40° C)               |
| Projected Life        | 70% Light Output at 50,000 Hours                 |
| Certification         | cETLus, Energy Star                              |
| Warranty              | 3 Year                                           |


#### DIMENSIONS

ID 5 1/4"

OD 6 7/8"

Depth 1 1/2"

Cut Out 5 1/2" to 6"

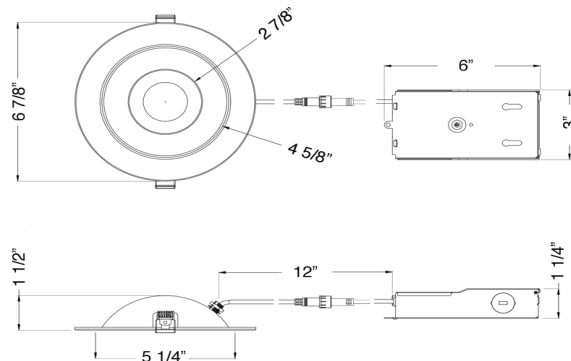

#### ACCESSORIES

Sold Separately



13" Mounting Plate Flat cat # **MP6-2**



26" Flat Rough-In Plates - cat # **RIP6**



Flanged Plate with Hanger Bars - cat # **FRP6**



Jumper Cable 10 ft - single CCT - cat # **JC-10**

Jumper Cable 10 ft - 5 CCT - cat # **JC-5CCT-10**



Goos Ring OD 7 5/8"

White cat # **GR6**

Black cat # **GR6-BK**

**Lotus LED Lights CANADA**

800-15355 24 Ave Box 200, Surrey BC V4A 2H9 tel 604-538-3090  
Delta BC & Mississauga ON