

Type IC & Air-Tight



DESCRIPTION

4" Round Recessed LED With Integral Driver In Connection Box
Single Color or 5 CCT


FEATURES & BENEFITS

- 1/2" Thick - Install Directly Under Ceiling Joists
- Type IC Rated - No Housing Required
- Driver Inside Connection Box - No Junction Box Needed
- 5 CCT Switchable Option - User Selectable Light Colors

DIMENSIONS ID 4" OD 5" Cut Out 4 1/8" to 4 1/4"

Fixture Thickness: 1/2"

120V Triac Dimmable Driver Included

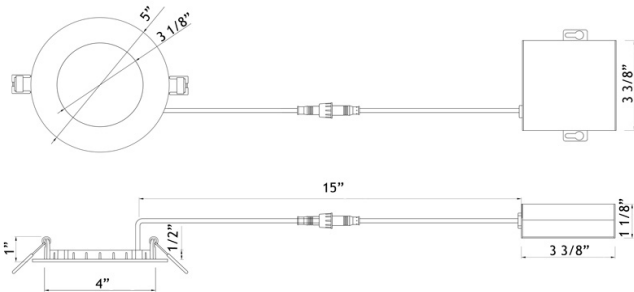

Project: _____

Location: _____

Model: _____ Qty: _____

Notes: _____

SPECIFICATION	
Applications	Renovations & New Construction
Energy Used	9 W
Color Temperature (K)	3000 4000 5 CCT
Light Output (lm)	600 620 600
Halogen Equivalent	60 W
Beam Angle	120°
CRI	80
Driver Input	120V AC 50/60 Hz
Dimming	TRIAC Dimmers 10% - 100%
Approved Location	Insulated Ceiling & Damp Locations
Air Tight	Yes
Ambient Temperature	-4° F (-20° C) to +104° F (+40° C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus, Energy Star
Warranty	3 Year

5 CCT Option



ORDERING GUIDE Example **LED-S9W-3K-WH**

LED-S9W	CCT	Trim
	- xK	- WH

3000K	3K	- WH	
4000K	4K	- WH	
5 CCT	5CCT	- WH	
6 pack 5CCT	5CCT	- WH	- 6P

Stock trim - White
Other Trim Colors Available By Custom Order

ACCESSORIES

Sold Separately

- 13" Mounting Plate Flat cat # **MP4-2**
- 13" Mounting Plate Flanged cat # **MP4**
- 26" Flat Rough-In Plates - cat # **RIP412**
- Flanged Plate with Hanger Bars - cat # **FRP4**
- Jumper Cable 10 ft. Maximum Extension 40 ft
For single light color - cat # **JC-10**
For 5CCT version - cat # **JC-5CCT-10**
- Goof Ring White OD 5 3/4" cat # **GR4**